

# CP-UNC-DA41L3B-D-LQ

4MP Dual Light Dome Camera - 30Mtr.



- 1/2.8" 4MP PS CMOS Image Sensor (0.9071 centimeters)
- Max. 4MP (2688 × 1520)@1-25/30fps/ (2560 × 1440)@1-25/30
- Instostream, H.265, H.264, H.264H, H.264B, MJPEG
- Support Triple stream
- Support Built-in Mic, Built-in speaker
- 3.6mm fixed Lens
- WDR (120dB), Day/Night (ICR), 3D NR, ROI, AWB, AGC, BLC, HLC, Digital watermarking
- IR Range of 30 Mtr., Warm Light Range of 30 Mtr., PoE, IP67



## System Overview

The CP PLUS Advanced Dual Light Cameras provide the perfect solution for elevating your security system. Designed for superior adaptability, these cameras support multiple illumination modes and advanced monitoring features, ensuring unmatched performance in various environments.

## CTC Technology:

CP PLUS Trusted Core Technology is a multi-layered security architecture that brings together the best of cyber security practices and technological intelligence. It is not just an enhancement; it is a complete redefinition of how surveillance should function in today's digital landscape - more intelligent, more secure, and more reliable than ever before.



# CP-UNC-DA41L3B-D-LQ

## 4MP Dual Light Dome Camera - 30Mtr.

### Functions

#### Instastream

This camera has been designed with the latest and most efficient innovation among the standard video compression designs. Smart encoding algorithms developed by CP PLUS help in saving up to 70% more bandwidth than H.265 along with making it more beneficial for minimizing bandwidth and storage costs. It enhances video coding efficiency while providing high resolution and the rate of frame in the video using Intelligent Region Perception to detect motion in each frame.

#### Regions of interest

Regions of Interest (ROI) is a user defined feature that allows the operator to monitor specific areas of a scene while still maintaining overall situational awareness of less important areas.

#### True Day/Night

When the scene is too dark, the image is captured by illuminating an infrared light through the camera onto the scene that greatly helps with making the scene visible for the lens. It delivers color images during the day and automatically switches to the monochrome feature as the scene darkens.

#### Power over Ethernet (PoE)

CP PLUS cameras with Power over Ethernet (PoE) technology offer a simple and efficient installation by using a single Ethernet cable to deliver both power and data. This eliminates the need for separate power adapters, reduces cable clutter, and ensures a cleaner setup.

### About CP PLUS

The brand that is on its way to lead the world when it comes to the security and surveillance industry, CP PLUS, keeps bombarding the market with the most reliable range of products that have been designed carefully and methodically to automate the whole surveillance and security process, no matter how big your premises are.

It was the initiative to help the public in the area where they are the most vulnerable and to empower the sense of safety in our hearts that had conceptualized CP PLUS. And embarking on its mission to make the world a safer and more secure place has taken the brand's journey to unprecedeted levels even when compared to international competitors.



## CP-UNC-DA41L3B-D-LQ

4MP Dual Light Dome Camera - 30Mtr.


Feature	Specification
Image Sensor	1/2.8" 4MP PS CMOS Image Sensor (0.9071 centimeters)
Effective Pixels	2688 (H) x 1520 (V)
Minimum Illumination	0.001 lux@F1.4 (Color, 30 IRE), 0.0001 lux@F1.4 (B/W, 30 IRE), 0 lux (IR on)
Angle Adjustment	Pan: 0°–360°, Tilt: 0°–78°, Rotation: 0°–360°
Shutter Speed	Auto/Manual 1/3 s–1/100,000 s
RAM	128 MB
White Balance	Auto, Natural, Street lamp, Outdoor, Manual, Regional custom
ROM	128 MB
Gain Control(AGC)	Auto/Manual
Lens Type	Fixed-focal
Max. Aperture	F1.4
Lens Mount	M12
Close Focus Distance	3.6 mm: 1.5 m
DORI Distance	Lens 3.6mm: 78.0 m (Detect), 31.2 m (Observe), 15.6 m (Recognize), 7.8 m (Identify)
Lens	3.6mm fixed Lens
S/N Ratio	>58dB
Back Light Compensation	BLC/ HLC/ WDR(120dB)
Video Compression	Instastream, H.265, H.264, H.264H, H.264B, MJPEG (Only supported by the sub stream)
Day/Night	Auto(ICR)/Color/B/W
Angle of View	3.6 mm: H: 78°, V: 42°, D: 92°
IR Number	1 IR LED, 1 Warm light
IR	IR Range of 30 Mtr.
Warm Light	Warm Light Range of 30 Mtr.
Smart Illumination	Support

Feature	Specification
Smart search	Work together with Smart NVR to perform refine intelligent search, event extraction and merging to event videos
Resolution	4MP (2688 × 1520)/ (2560 × 1440), 3MP (2304 × 1296), 2MP (1920 × 1080), 1.3MP (1280 × 960), 720p (1280 × 720), D1 (704 × 576/ 704 × 480), VGA (640 × 480), CIF (352 × 288/ 352 × 240)
Noise Reduction	3D NR
Motion detection	OFF/ON (4 areas, rectangular)
Privacy Mask	4 areas
Stream Capability	Triple stream
Frame Rate	Main stream: 4MP (2688 × 1520)@1-25/30fps/ (2560 × 1440)@1-25/30 Sub stream 1: 720p (1280 × 720), D1 (704 × 576)@1-25 fps/ (704 × 480)@1-30 fps, VGA(640 × 480)@1-30fps, CIF (352 × 240)@1-30fps/ (352 × 288)@1-25fps Sub stream 2: D1 (704 × 576)@1-25 fps/ (704 × 480)@1-30 fps, VGA(640 × 480)@1-30fps, CIF (352 × 240)@1-30fps/ (352 × 288) @1-25fps
Video format	PAL/NTSC
ROI	Support (4 areas)
Audio	Built-in Mic
Built-in Speaker	Support
Audio Compression	G.711a, G.711Mu, PCM, G.726, AAC
OSD	Camera title, Date & Time
Bit Rate Control	CBR/VBR
Bit Rate	H.265: 3 kbps-6144 kbps, H.264: 8 kbps-6144 kbps
SDK and API	Support
User/Host	6 (Total bandwidth: 36 M)
SMD	Support the classification and accurate detection of human and vehicle
Mirror Function	Support
Alarm Event	Network disconnection, IP conflict, illegal access, Motion detection, Video tampering, Audio detection, SMD (human & Motor Vehicle), Security exception
IR Control	Auto, Manual
Browser	IE, Chrome, Firefox
Smart IR	Support

Feature	Specification
Protocol	SFTP, IPv6, IPv4, DNS, RTCP, NTP, RTP, HTTP, HTTPS, SNMP V3, TLS Version 1.2, TCP/IP, PPPoE, NFS, UDP, ICMP, IGMP, SSL, DHCP, SMTP, RTSPS, ONVIF (Profile S, Profile G, Profile T), unicast, multicast
Ethernet	RJ-45 (10/100 Base-T)
Certificates	ISO 9001: 2015, ISO 20000-1 : 2018, CE, FCC and RoHS, BIS, STQC approved compliance report
Image Rotation	4MP only support 0°/180° 2MP & lower will support 0°/90°/180°/270°
Cyber Security	AES 256-bit Encryption, Configuration encryption, trusted execution, Digest, security logs, WSSE, account lockout, syslog, video encryption, IP/MAC filtering, HTTPS, trusted upgrade, trusted boot
Iris Control	Fixed
Power Source	12 VDC/PoE (802.3af)
Power Consumption	Basic: 1.8 W (12 VDC); 2.5 W (PoE); Max.: 8.5 W (12 VDC), 10 W (PoE) (H.265 + intelligence on + WDR + IR intensity + warm light deterrence + speaker)
Weatherproof Standard	IP67
Operating Temperature	-40 °C to +60 °C (-40 °F to +140 °F)
Operating Humidity	≤95% (RH), non-condensing
Storage Temperature	-40 °C to +60 °C (-40 °F to +140 °F)
Storage Humidity	≤95% (RH), non-condensing
Casing	Metal + Plastic
Dimension	100.9 mm × 109.9 mm
Weight	320g

Published Date –19-08-2025

Dimensions (mm/inch)

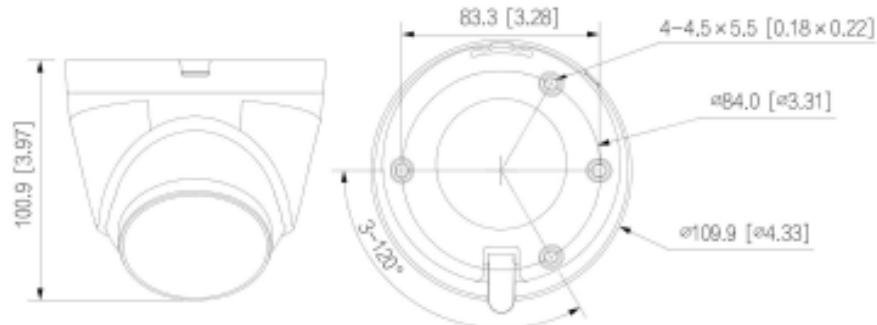

**Company Name:**

CP PLUS (Aditya Infotech Ltd.)

F-28 Okhla Industrial Area, Phase 1,

New Delhi 110020, INDIA

**Contact Mail ID :-** [customercare@cpplusworld.com](mailto:customercare@cpplusworld.com)



*\*Product casing and specifications are subject to change without prior notice*