
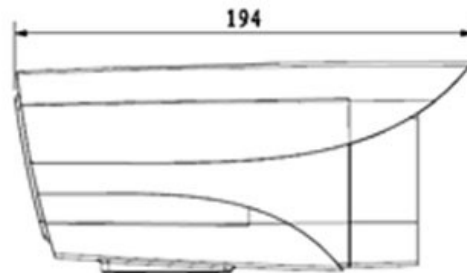


CP- UNC-TA21L5**2MP Full HD IR Network Bullet Camera - 50Mtr.****Main Features**

- 1/2.7" 2MP PS CMOS Image Sensor (0.9407 centimeters)
- Max 25/30fps@1080P(1920×1080)
- Instastream, H.265 dual-stream encoding
- DWDR, Day/Night (ICR), 3D-DNR, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (6mm optional)
- IR Range of 50 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMs Pro



CP- UNC-TA21L5

2MP Full HD IR Network Bullet Camera - 50Mtr.

Feature

Image Sensor
Effective Pixels
Minimum Illumination
Shutter Speed
White Balance
Lens
Gain Control (AGC)
Angle of View
Video Compression
S/N Ratio
Back Light Compensation
Video Streaming
Resolution
Motion detection
Privacy Mask
ICR
ROI
Bit Rate
Protocol
Ethernet
User/Host
IR
Smart Phone
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

1/2.7" 2MP Progressive scan CMOS (0.9407 centimeters)
1920(H) x 1080(V), 2 Megapixels
0.03 lux@F2.0 (color 1/30s,30IRE) 0.009 lux@F2.0 (color 1/3s,30IRE) 0 Lux@F2.0 (IR on)
Auto/Manual, 1/3~1/100000s
Auto/Manual
3.6mm (6mm optional)
Auto/Manual
3.6mm: H:103.8° V:87.5° D:47°, 6mm: H:62.4° V:54.7° D:31.3°
Instream/H.265/H.264+/H.264H/MJPEG (Sub stream)
More than 50dB
BLC/ HLC/ DWDR
Main Stream: 1080P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)
1080P(1920× 1080)/1.3M(1280×960)/720P(1280× 720)/D1(704 × 576/704× 480)/ VGA
(640×480)/CIF(352× 288/352× 240)
Supports
Up to 4 areas
Auto (ICR)/Color/B/W
Supports
H265:12K~6400K H.264;H.264H;H.264B:32K ~8192K
HTTP; TCP; ARP; RTSP; RTP; UDP; DHCP; DNS; IPV4; NTP; Multicast; ONVIF; CGI
RJ-45 (10/100Base-T)
20 Users
IR Range of 50 Mtr.
iPhone, iPad, Android Phone
-40°C~+60°C , Less than 95%RH
DC12V, PoE (802.3af)
Max 5.1 W
IP67
φ194mm× 96mm× 89mm
0.64Kg